

Trasteel TECH



**Hydraulic
Hammers**

Hydraulic Hammers



Trasteel Tech introduces its **J Series** of hydraulic hammers: a broad, groundbreaking range of demolition tools that sets a new benchmark in the industry.

The **J Series** represents a leap forward in terms of power, durability and efficiency to tackle the most demanding construction and demolition jobs.

Its Nitrogen inertial energy recovery system provides a higher impact energy, and its soundproofing and buffering system is designed for operator comfort and vibration reduction in operation.



Internal Valve Hammers. J Series

Special Features:

- Soundproofing housing design
- Polyurethane buffers
- MC Nylon plates designed for a perfect fit
- Low recoil. Reduction of vibrations
- High impact energy
- Low noise level
- High performance and low maintenance cost
- (Optional) Automatic lubrication system

Valve Assembly

The control valve is built into the housing and it controls the reciprocating motion of the piston.

Accumulator Assembly

It compensates for pressure in the hydraulic circuit and prevents vibrations. (Use only N2 gas).

- W/o accumulator: JBN40 ~ JBN125
- W/ accumulator: JBN135 ~ JBN155

Front head Assembly

The front head supports the entire hammer. The thrust ring and the thrust bush prevent the tool's vacuum strokes.

Energy chamber


Compressed N2 gas drives the piston to strike the tool. (Use only N2 gas).

Cylinder Assembly

Heavy-duty monobloc cylinder housing.

Piston

The kinetic energy generated by the piston, propelled by the gas in the energy chamber, impacts the tool to effectively break rocks.

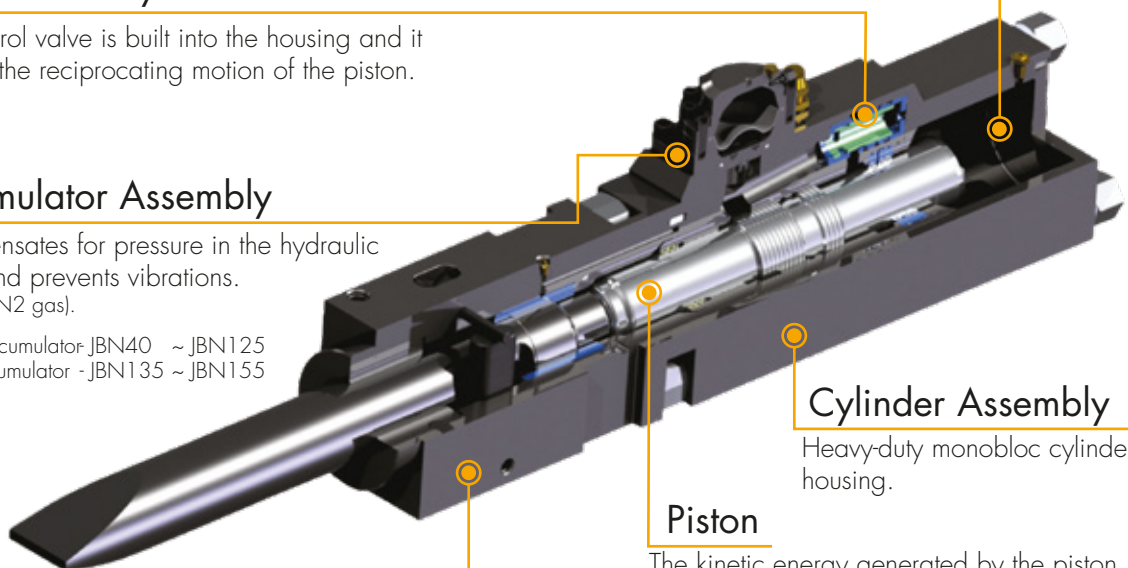

J Series - Light Range



Description		Model	Unit	JBN40	JBN45	JBN53	JBN60	JBN70	JBN75	JBN90	JBN100
Operating Weight*			Kg	115	125	180	250	310	380	570	890
Tool (Moil type)	Diameter		mm	40	45	53	60	70	75	90	100
	Weight		Kg	4	6	9	12	20	25	41	59
Operating Pressure (Hammer)			bar	80 ~ 100	80 ~ 100	90 ~ 120	100 ~ 130	95 ~ 130	100 ~ 140	130 ~ 160	150 ~ 170
Pressure Setting (Machine)			bar	150	150	150	160	170	180	190	200
Blows Per Minute			bpm	800 ~ 1.400	700 ~ 1.200	600 ~ 1.100	500 ~ 1.000	450 ~ 1.000	475 ~ 950	480 ~ 850	450 ~ 780
Accumulator Pressure (N2 gas)			bar	NO ACCUMULATOR							
Energy Chamber Pressure (N2 gas)			bar	14	14	16	16	16	16	16	16
Required Oil Flow			l / min	15 ~ 30	20 ~ 35	25 ~ 50	30 ~ 60	34 ~ 60	40 ~ 80	45 ~ 85	85 ~ 110
Excavator Range	Min.		ton	0,8	1,2	2,5	3	3,5	6	6	10
	Max.		ton	2,5	3	4,5	5,5	7	9	13	17
	Suitable		ton	1	2	3	5	6	7	10	14

*Weights may vary depending on the adapter

J Series - Medium Range



Description		Model	Unit	JBN125	JBN135	JBN140	JBN155
Operating Weight*			Kg	1.200	1.700	1.930	2.400
Tool (Moil type)	Diameter		mm	125	135	140	155
	Weight		Kg	97	125	129	193
Operating Pressure (Hammer)			bar	150 ~ 170	160 ~ 180	160 ~ 180	160 ~ 180
Pressure Setting (Machine)			bar	200	210	210	220
Blows Per Minute			bpm	420 ~ 730	350 ~ 680	280 ~ 550	280 ~ 550
Accumulator Pressure (N2 gas)			bar	N/A		60	
Energy Chamber Pressure (N2 gas)			bar	16	16	16	16
Required Oil Flow			l / min	100 ~ 120	120 ~ 150	120 ~ 150	160 ~ 240
Excavator Range	Min.		ton	15	18	20	28
	Max.		ton	20	28	30	40
	Suitable		ton	17	20	24	34

*Weights may vary depending on the adapter

J Series - Heavy Range



JBN645

JBN745



JBN770

JBN800



JBN900

JBN1000

Description	Model	Unit	JBN645	JBN745	JBN770	JBN800	JBN900	JBN1000
Operating Weight*		Kg	2.850	3.300	3.800	4.400	6.300	10.500
Tool (Moi type)	Diameter	mm	155	165	175	190	208	230
	Weight	Kg	174	236	279	326	415	470
Operating Pressure (Hammer)		bar	150 ~ 190	160 ~ 190	160 ~ 200	160 ~ 200	180 ~ 205	220 ~ 240
Pressure Setting (Machine)		bar	240	240	250	250	250	270
Blows Per Minute		bpm	300 ~ 500	300 ~ 500	250 ~ 500	250 ~ 500	170 ~ 220	140 ~ 170
Accumulator Pressure (N2 gas)			60					
Energy Chamber Pressure (N2 gas)		bar	17	17	18	18	18	18
Required Oil Flow		l / min	180 ~ 250	180 ~ 250	210 ~ 280	220 ~ 290	230 ~ 300	360 ~ 430
Excavator Range	Min.	ton	33	33	45	45	55	70
	Max.	ton	50	50	55	70	100	150
	Suitable	ton	40	40	50	55	70	100

*Weights may vary depending on the adapter

J Series - Skid Steer Loader / Backhoe Loader



Backhoe Loader

Description	Model	Unit	JBN70BL	JBN75BL
Operating Weight*		Kg	326	410
Tool Diameter		mm	70	75
Blows Per Minute		bpm	450 ~ 1.000	475 ~ 950
Operating Pressure		bar	95 ~ 130	100 ~ 140
Machine Pressure		bar	170	180
Energy Chamber Pressure		bar	16	16
Required Oil Flow		l / min	34 ~ 60	40 ~ 80

*Weights may vary depending on the adapter


Skid Steer Loader

Description	Model	Unit	JBN45SL	JBN53SL	JBN70SL	JBN75SL
Operating Weight*		Kg	190	280	382	475
Tool Diameter		mm	45	53	70	75
Blows Per Minute		bpm	700 ~ 1.200	600 ~ 1.100	450 ~ 1.000	475 ~ 950
Operating Pressure		bar	80 ~ 100	90 ~ 120	95 ~ 130	100 ~ 140
Machine Pressure		bar	150	150	170	180
Energy Chamber Pressure		bar	14	16	16	16
Required Oil Flow		l / min	20 ~ 35	25 ~ 50	34 ~ 60	40 ~ 80



*Weights may vary depending on the adapter

Suitable machine and optimal operating pressure

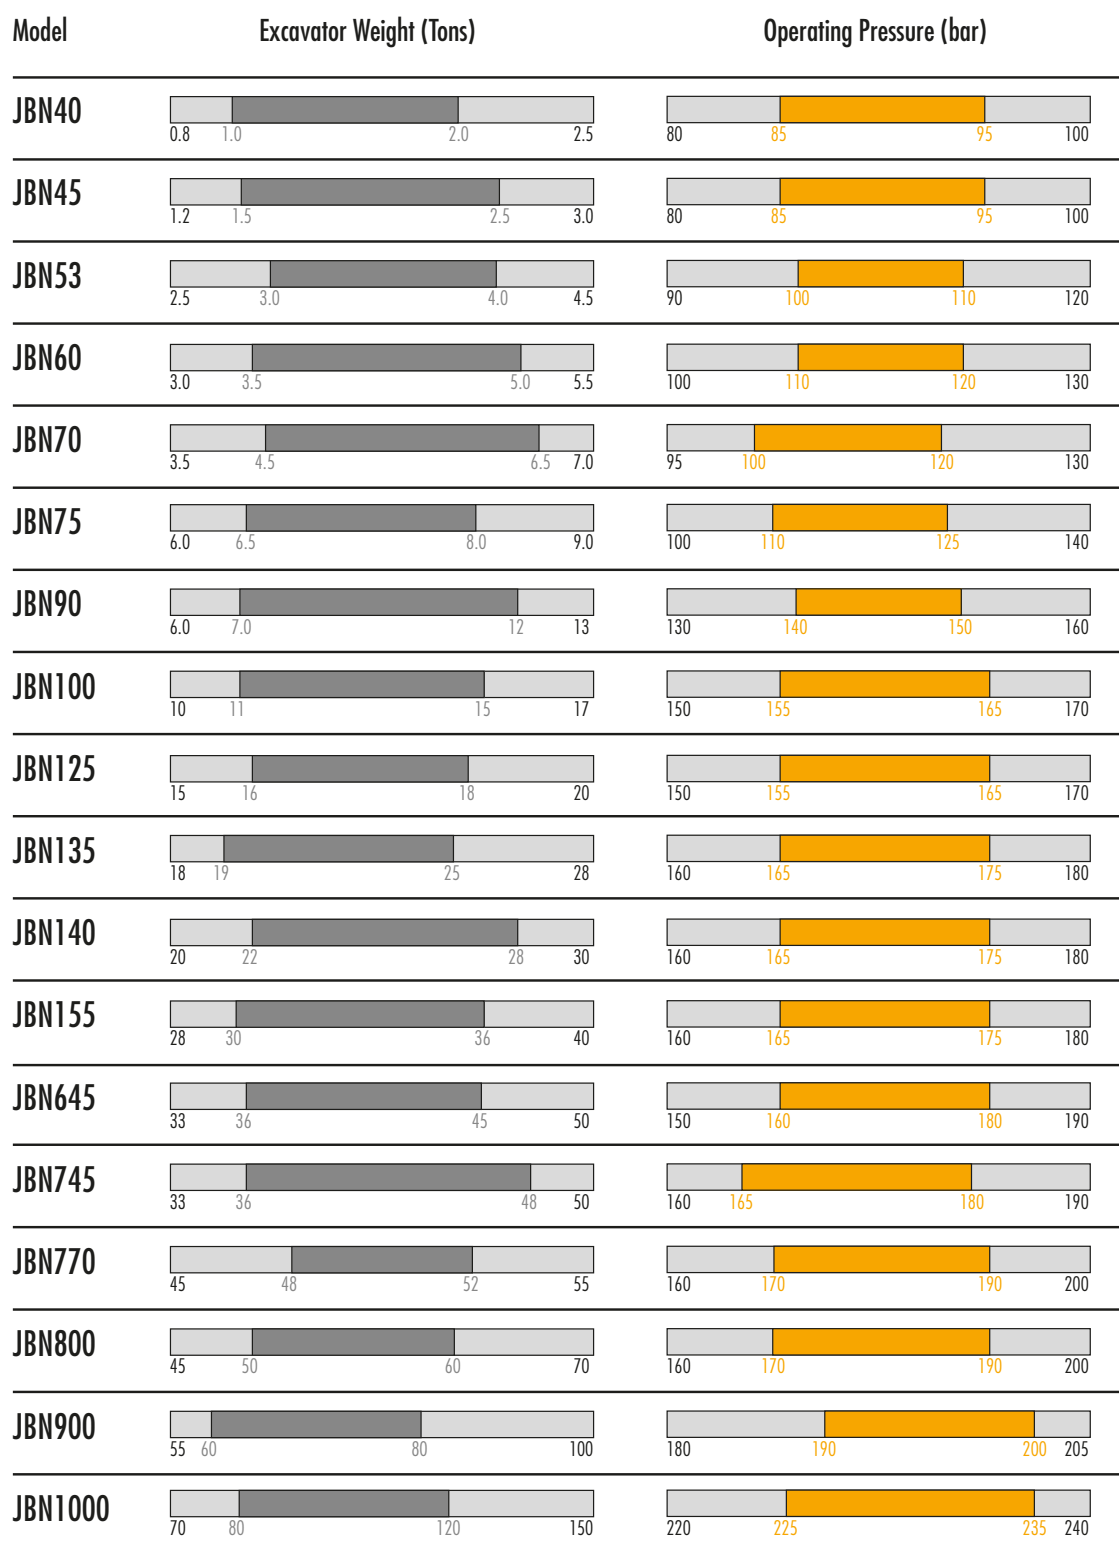

* Recommended suitable machine (tons)

* Optimal operating pressure (bar)

■ Best

■ Best

■ Possible

■ Possible

